


(\*) Standard width of lateral hooks - alterable on request

Minimum recommended inclination: 4° (7%)

TECHNICAL DATA GRECA 4			
Thickness	12	16	mm
Total height	52	56	mm
Number of walls	[ 4 ] honeycomb		
Number of waves	4		
Pitch of waves	~ 333 mm		
Modular width	1000 ± 5 mm		
Standard length	6000 mm		
Length on request	max. 13500 mm		
Thermal transmission [U]	2,25	1,99	W/m²K
Light transmission:	Transparent (*)	~ 61	~ 56
	White Opaline	~ 45	~ 40
Thermal expansion	0,065		mm/mK
Temperature range	-40 / +120		°C
Fire classification EN 13501-1	B s1 d0		

(\*) standard - other colours produced on request for quantities

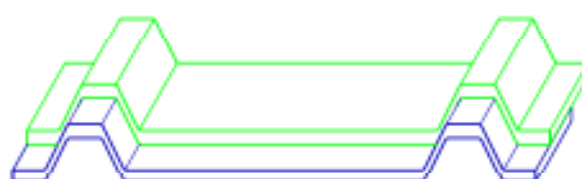






Perfect placement one upon another  
End edges thermosealed




Side junction on composite panel roof



Sheets placed side by side

ACCESSORIES	Description
	PE-shaped inlay - top
	PE-shaped inlay - bottom
 Ø 6,3 x 90	Selftapering screw for steel and Maxi washer with gasket
	Cap straight with gasket
	PE adhesive gasket - 10 mt. rolls

### LOAD TABLE GRECA 4 - 12 mm

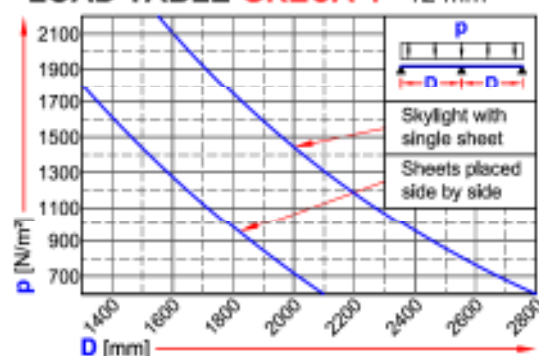

D = Distance between supports

For the load with thickness 16 mm sheets, pls ask to Akraplast